

COBRA[®] PLUS

Unmatched Flexibility | Extremely Efficient | Superior Functionality



Semi-automatic stretch wrapping machine

COBRA[®] PLUS

Flexible, efficient and functional pallet wrapping solution

Unmatched Flexibility

Thanks to the rotating arm technology, the pallet load does not move during the stretch wrapping process. Therefore, the Cobra Plus is ideal for wrapping loads that are unstable, light, very heavy or odd-shaped – whatever the product type. The Cobra Plus comes standard with an independent floor stand, but can also be mounted to a column or wall. This innovative design also comes standard with an adjustable wrapping arm that can easily be modified to accommodate larger loads at no additional cost and provides the versatility to adapt to future needs.

Extremely Efficient


The motorized power pre-stretch system with adjustable film tension control guarantees optimal film usage. Also, by providing variable film tension control throughout the wrap cycle, superior load containment can be achieved while eliminating film breaks and product damage. The patented film carriage ensures consistent performance and optimal film consumption.

Superior Functionality

Four individual wrap programs can be stored using the touch screen HMI for simple operation of the machine. The programs include eight functions which can be adjusted to meet the demands of the most challenging applications.



The rotating arm can be easily adjusted to achieve a wrapping diagonal of 2000 mm or 2300 mm ; offering extreme versatility at no additional cost.

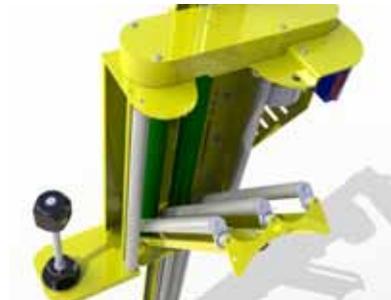

The power pre-stretch carriage offers optimal load containment and optimal film usage. It also allows for easy film threading.



Easy to use for simple operation and maximum functionality. Adjustments for the number of wraps, wrap pattern, film tension, overlap, overwrap, and up/down speed are standard.

Dimensions		Technical Details		Options
Overall Height	3000 mm (standard)	Rotation Speed	Up to 12 RPM	Height Extension Upgrades
	3350 mm or 3700 mm (optional)	Capacity	Up to 35 pallets/hr	
Max. Pallet Height	2200 mm (standard)	Weight	640 kg	Column/ Wall Mounting Kit
	2550 mm or 2900 mm (optional)	Voltage	230 V - 1 phase - 50 Hz	
Maximum Pallet Diagonal	2000 mm or 2300 mm	Control	PLC and touchscreen HMI	Mechanical Roping Device
		Film Width	500 mm	
		Max. film dia.	250 mm	
		Standard Mounting	Floor Stand	